


Electronic pipette

dPette is an innovative electronic pipette developed by DLAB. It combines the feature of manual pipette as ergonomic and light weight with the feature of electronic pipette as labor-saving and high performance, it offers new pipetting experience to the users.

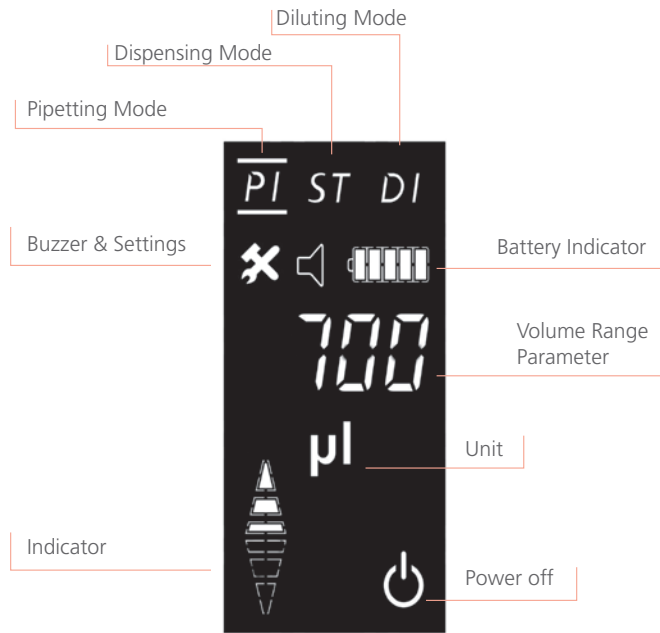

dPette+ Multifunction Electronic Pipette

dPette Simple Electric Pipette

Features

- High accuracy, high performance stepper motor ensures accuracy and repeatability, eliminating manual pipetting errors
- A motor driven digital control pipette with multifunction
- 2 buttons handle all operational settings
- Light weight, ergonomic design, small body dimension for easy handling that guarantees fatigue free pipetting
- Pipetting, Mixing, Stepper and Dilution(Only dPette+)
- Pipetting, Mixing(dPette)
- Adjustable speeds for aspiration and dispensing
- Li-ion battery and dual charging modes enable longer operation time
- Self calibration – dPette can be connected to a PC via. USB for calibration by the user. Third party calibration is not required



dPette+

dPette

Specifications

Channels	Volume Range	Increment	Test Volume	Error limits in accordance to ISO8655-2			
				accuracy error		precision error	
				μL	%	s.d.* μL	CV%*
1	0.5-10	0.01	10	± 0.10	± 1.00	0.05	0.50
			1	± 0.035	± 3.50	0.03	3.00
1	5-50	0.1	50	± 0.40	± 0.80	0.15	0.30
			5	± 0.15	± 3.00	0.125	2.50
1	30-300	1	300	± 1.80	± 0.60	0.60	0.20
			30	± 0.90	± 3.00	0.21	0.70
1	100-1000	5	1000	± 6.00	± 0.60	2.00	0.20
			100	± 3.00	± 3.00	0.60	0.60

* s.d. = Standard Deviation

*CV = Coefficient of Variation